


FEATURES

These hydraulic press are specially designed for precision deep drawing of metal plates. Available in 100 to 2000 tons, offer high efficiency and accuracy.


Our design adopt special loop control system in order to meet the modern industrial requirement of high speed production and extremely safety.

Safe and accurate control systems, simple operation and high efficiency.

Special features: adopting logical hydraulic system, anti-leaking anti-vibration, beautiful appearance and easy to maintenance.

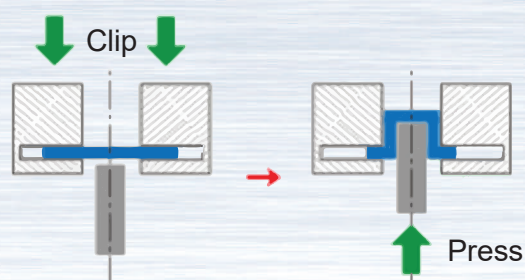

APPLICATIONS

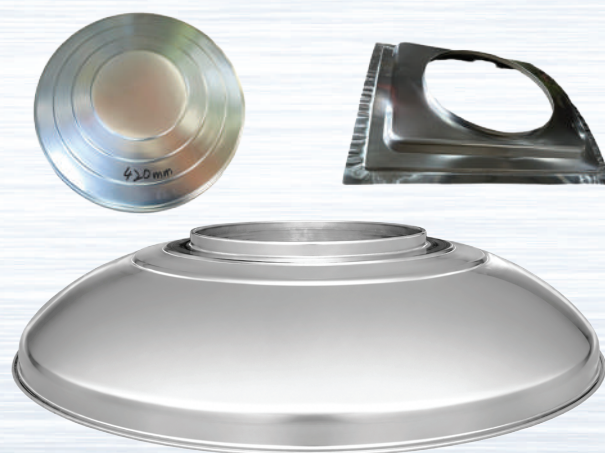


SPECIFICATIONS

型式 Type (Model)	出力 Capacity (Ton)	工作台面積 Table Size (mm)	最大開距 Daylight (mm)	行程 Stroke (mm)	緩衝能力 Cushion Capacity (ton)	緩衝行程 Cushion Stroke (mm)	下降速度 Descending Speed (mm/sec)	加壓速度 Pressing Speed (mm/sec)	上昇速度 Ascending Speed (mm/sec)	電動機 Drive Motor (HP)
CTV-500	500	2000X1500	1400	1000	180	350	200-250	10-12	250	75
CTV-600	600	2000X1500	1400	1000	200	350	250	10-12	250	100
CTV-800	800	2500X1800	1500	1000	250	400	250	10-12	250	125
CTV-1000	1000	3000X2000	1800	1200	300	500	250	10-12	250	150
CTV-1200	1200	3200X2400	1800	1300	450	450	300-350	10-20	250	175
CTV-1500	1500	3600X2400	2000	1500	500	500	300-350	10-20	250	200



FEATURES

- The machine structure is 4-Post. All the parts are including in machine body, the operation is safe and simple.
- Design is simple and free of trouble.
- The machine is multiple purpose, we are able to modify the design and enhance functions to meet your special requirements.

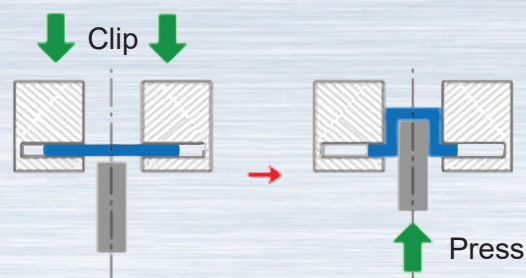

APPLICATIONS

1. Press in and push out of shafts and sockets.
2. The bending and deep drawing of sheet metal.
3. Straighten, forming, shear and punching.
4. Compression testing.
5. Production of computer cabinet and parts
6. Office furniture components including drawer, rails.
7. High tech composite material press process.



SPECIFICATIONS

型式 Type (Model)	出力 Capacity (Ton)	工作台面 Table size (mm)	最大開距 Daylight (mm)	行程 Stroke (mm)	下降速度 Descending Speed (mm/sec)	加壓速度 Pressing Speed (mm/sec)	上昇速度 Ascending Speed (mm/sec)	馬達 Motor (HP)
YCT-H10	10	550X425	450	300	120	10	100	3
YCT-H20	20	600X425	450	300	120	15	100	7.5
YCT-H30	30	600X500	450	300	120	14	100	10
YCT-H50	50	700X600	500	350	120	14	120	15
YCT-H100	100	750X600	600	400	120	14	120	20
YCT-H150	150	900X700	800	550	120	14	120	25
YCT-H200	200	1000X800	800	600	120	10	120	30
YCT-H300	300	1000X800	800	600	120	10	120	40

Under our continuous R&D, for any change in specifications without prior notice.


FEATURES

These hydraulic press are specially designed for precision deep drawing of metal plates. Available in 100 to 2000 tons, offer high efficiency and accuracy.

Our design adopt special loop control system in order to meet the modern industrial requirement of high speed production and extremely safety.

Safe and accurate control systems, simple operation and high efficiency.

Special features: adopting logical hydraulic system, anti-leaking anti-vibration, beautiful appearance and easy to maintenance.

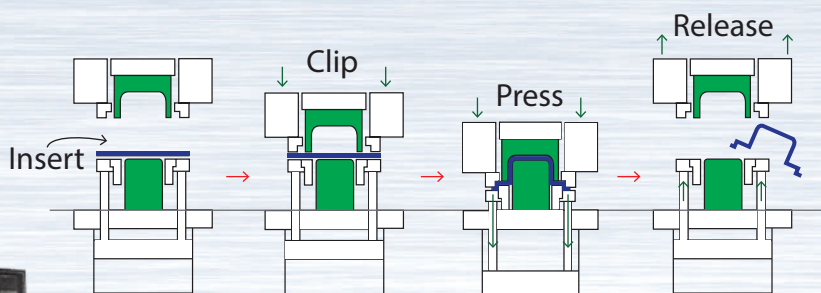

APPLICATIONS



SPECIFICATIONS

型式 Type (Model)	出力 Capacity (Ton)	工作台面積 Table Size (mm)	最大開距 Daylight (mm)	行程 Stroke (mm)	緩衝能力 Cushion Capacity (ton)	緩衝行程 Cushion Stroke (mm)	下降速度 Descending Speed (mm/sec)	加壓速度 Pressing Speed (mm/sec)	上昇速度 Ascending Speed (mm/sec)	電動機 Drive Motor (HP)
VCT-500	500	2000X1500	1400	1000	180	350	200-250	10-12	250	75
VCT-600	600	2000X1500	1400	1000	200	350	250	10-12	250	100
VCT-800	800	2500X1800	1500	1000	250	400	250	10-12	250	125
VCT-1000	1000	3000X2000	1800	1200	300	500	250	10-12	250	150
VCT-1200	1200	3200X2400	1800	1300	450	450	300-350	10-20	250	175
VCT-1500	1500	3600X2400	2000	1500	500	500	300-350	10-20	250	200




FEATURES

- A specialized machine for deep drawing of horizontal ss water tank
- Hole + Shape + Bend edge by one time work.

2 in 1 Process

Material

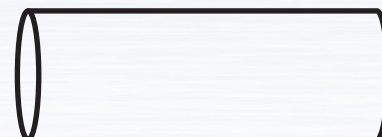

Cut Off



Forming



SPECIFICATIONS

型式 Type (Model)	出力 Capacity (Ton)	工作台面積 Table Size (mm)	最大開距 Daylight (mm)	行程 Stroke (mm)	緩衝能力 Cushion Capacity (ton)	緩衝行程 Cushion Stroke (mm)	下降速度 Descending Speed (mm/sec)	加壓速度 Pressing Speed (mm/sec)	上昇速度 Ascending Speed (mm/sec)	電動機 Drive Motor (HP)
VSF-200	200	500x500	1400	300	180	200	200-250	10-12	250	45
VSF-300	300	800x800	1400	300	200	200	250	10-12	250	50
VSF-400	400	800x800	1500	450	250	200	250	10-12	250	65
VSF-500	500	800x800	1800	450	300	200	250	10-12	250	75

Under our continuous R&D, for any change in specifications without prior notice.



FEATURES


These hydraulic press are specially designed for precision deep drawing of metal plates. Available in 100 to 500 tons, offer high efficiency and accuracy.

Our design adopt special loop control system in order to meet the modern industrial requirement of high speed production and extremely safety.

Safe and accurate control systems, simple operation and high efficiency.

Special features: adopting logical hydraulic system, anti-leaking anti-vibration, beautiful appearance and easy to maintenance.

2 IN 1 PROCESS

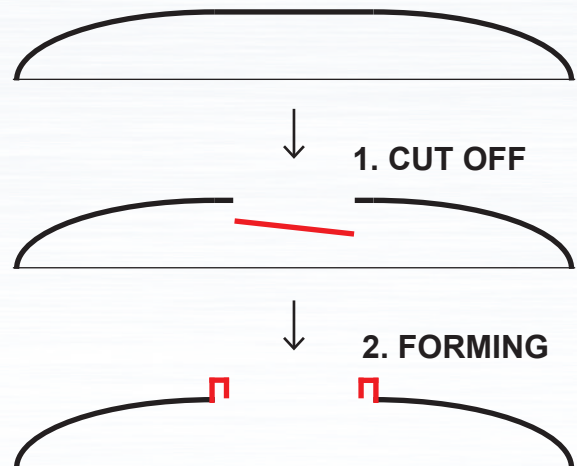


SPECIFICATIONS

型式 Type (Model)	出力 Capacity (Ton)	工作台面積 Table Size (mm)	最大開距 Daylight (mm)	行程 Stroke (mm)	緩衝能力 Cushion Capacity (ton)	緩衝行程 Cushion Stroke (mm)	下降速度 Descending Speed (mm/sec)	加壓速度 Pressing Speed (mm/sec)	上昇速度 Ascending Speed (mm/sec)	電動機 Drive Motor (HP)
VSC-200	200	500x500	1400	300	180	200	200-250	10-12	250	45
VSC-300	300	700x700	1400	300	200	200	250	10-12	250	50
VSC-400	400	800x800	1500	450	250	200	250	10-12	250	65
VSC-500	500	800x800	1800	450	300	200	250	10-12	250	75


Under our continuous R&D, for any change in specifications without prior notice.




Working Function




Stamping




Clip + Press




Press



Expanding / Reducing



Clip + Press



Forming


APPLICATIONS



Stamping forming



Screw & nut assembly

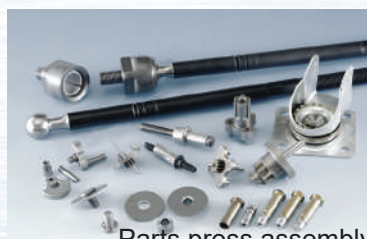

Parts press assembly



Tube expanding/reducing

SPECIFICATION

型式 Type (Model)	出力 Capacity (Ton)	工作台面 Table size (mm)	最大開距 Daylight (mm)	行程 Stroke (mm)	下降速度 Descending Speed (mm/sec)	加壓速度 Pressing Speed (mm/sec)	上昇速度 Ascending Speed (mm/sec)	馬達 Motor (HP)
VCT-C10	10	550X425	450	300	160	10	170	3
VCT-C20	20	600X425	450	300	160	15	160	5
VCT-C30	30	600X500	450	300	170	14	160	7.5
VCT-C40	40	700X500	500	300	170	14	160	10
VCT-C50	50	700X600	500	350	180	14	180	10
VCT-C80	80	700X600	500	350	180	14	180	15
VCT-C100	100	750X600	600	400	200	14	200	15
VCT-C150	150	900X700	700	450	200	14	200	20
VCT-C200	200	1000X800	700	450	200	10	200	25
VCT-C300	300	1000X800	700	450	200	10	200	30

Under our continuous R&D, for any change in specifications without prior notice.